



DESCRIPTION



- Metal construction with a chrome finish
- R1/2 inlet connections
- Includes 400mm long flexible inlet hoses

OPERATION



- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 110 degree arc of handle travel

FLOW



- Flowrate is 0.20L/s minimum under 0.3Mpa

CARTRIDGE



- Ceramic 35mm cartridge design
- Nonmetallic / nonferrous and ceramic material

STANDARD




- Designed to meet GB standard

WARRANTY



- 5 years limited warranty against leaks and drips

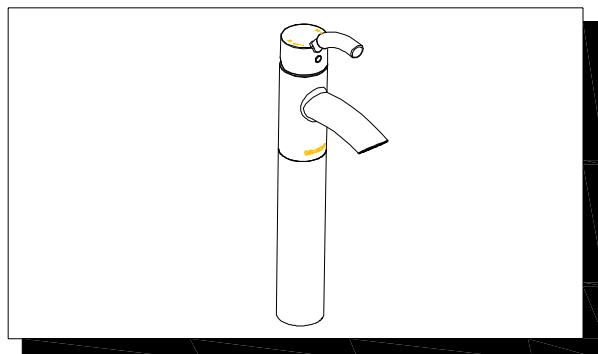



DUNA

Single-Handle Single Mounted Vessel Lavatory Faucet
Without Waster Assembly

Models: 5406 / 5406V / HK5406

NOTE: See reverse side
for illustrated parts

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THRU 35mm MIN. DIA. HOLE

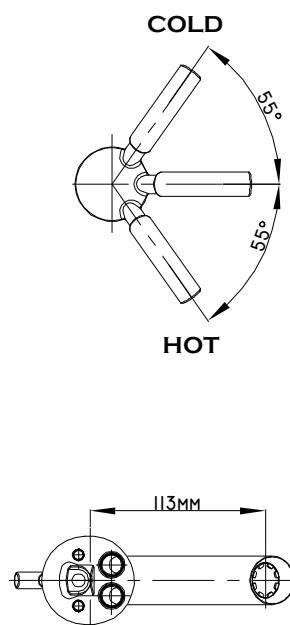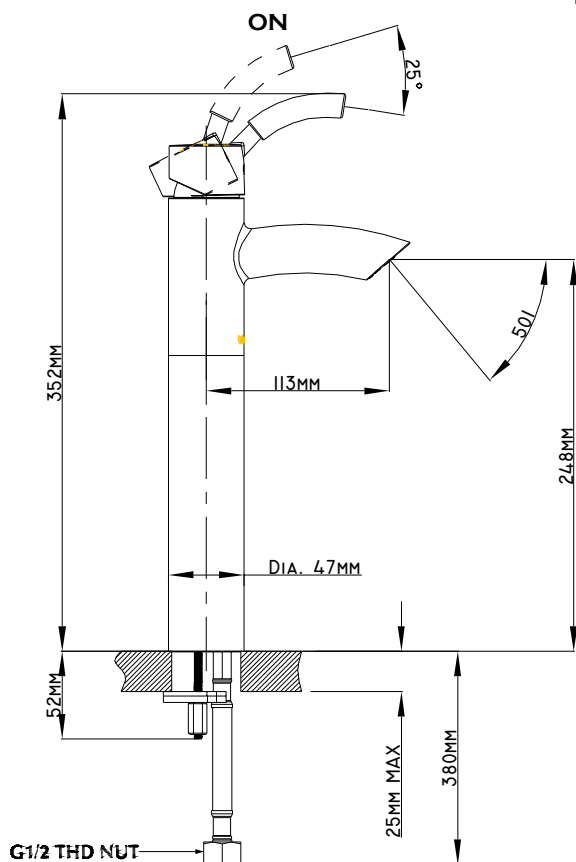

CRITICAL DIMENSION

(DO NOT SCALE)